

Dirac Delta Function

The Dirac delta “function” $\delta_a(t)$ is used to model impulse forcing. In other words, suppose we want to model a unit force that is applied instantaneously at time $t = a$. We begin with the function

$$g_{\Delta t}(t) = \begin{cases} \frac{1}{2\Delta t}, & \text{if } a - \Delta t \leq t < a + \Delta t; \\ 0, & \text{otherwise.} \end{cases}$$



We can write $g_{\Delta t}$ in terms of the Heaviside function. We get

$$g_{\Delta t}(t) = \frac{1}{2\Delta t} (u_{a-\Delta t}(t) - u_{a+\Delta t}(t)).$$

Let's calculate the Laplace transform of $g_{\Delta t}$. To do so, we'll need the limit

$$\lim_{x \rightarrow 0} \frac{e^{2sx} - 1}{x} =$$

This limit can be calculated using L'Hospital's Rule, using power series, or by observing that this limit is simply $f'(0)$ for the function $f(x) = e^{2sx}$.

Now we calculate the Laplace transform of $g_{\Delta t}$:

We take the limit as $\Delta t \rightarrow 0$.


Dirac Delta Function. The Dirac delta function $\delta_a(t)$ is the “function” such that

$$\mathcal{L}[\delta_a] = e^{-as}.$$


Example. Consider the initial-value problem

$$\frac{d^2y}{dt^2} + 4\frac{dy}{dt} + 7y = 15\delta_5(t), \quad y(0) = 2, \quad y'(0) = -1.$$


(Next page is entirely blank.)



Here is the graph of the solution:

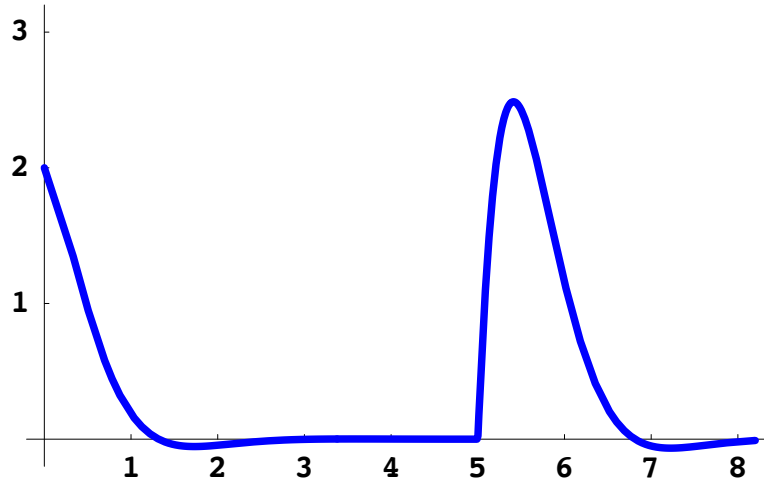

Here is the graph of its derivative:

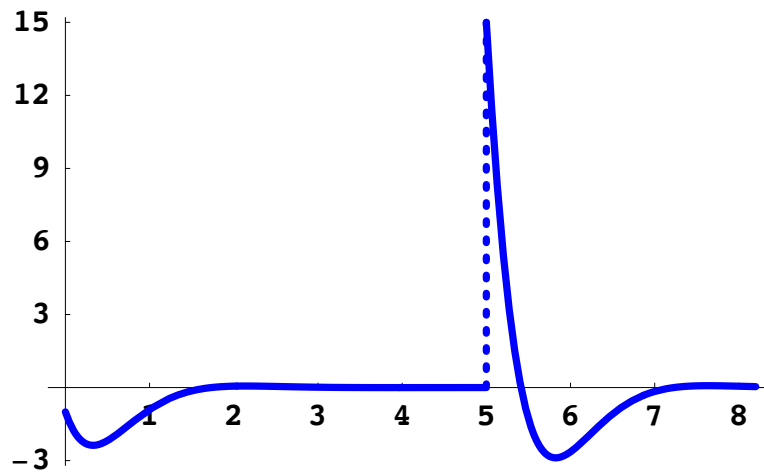

Summary of transform rules and table of standard transforms

Here are important selections from the summary on page 620 in your text.

$y(t)$	$Y(s) = \mathcal{L}[y]$
$y(t) = 1$	$Y(s) = \frac{1}{s} \quad (s > 0)$
$y(t) = e^{at}$	$Y(s) = \frac{1}{s - a} \quad (s > a)$
$y(t) = u_a(t)$	$Y(s) = \frac{e^{-as}}{s} \quad (s > 0)$
$y(t) = \cos \omega t$	$Y(s) = \frac{s}{s^2 + \omega^2} \quad (s > 0)$
$y(t) = \sin \omega t$	$Y(s) = \frac{\omega}{s^2 + \omega^2} \quad (s > 0)$
$y(t) = \delta_a(t)$	$Y(s) = e^{-as}$

Properties of the Laplace Transform

$$\mathcal{L}\left[\frac{dy}{dt}\right] = s\mathcal{L}[y] - y(0)$$

$$\mathcal{L}[y_1 + y_2] = \mathcal{L}[y_1] + \mathcal{L}[y_2]$$

$$\mathcal{L}[\alpha y] = \alpha\mathcal{L}[y] \text{ for any constant } \alpha$$

$$\mathcal{L}[u_a(t)y(t - a)] = e^{-as}\mathcal{L}[y]$$

$$\mathcal{L}[e^{at}y(t)] = Y(s - a) \text{ where } Y = \mathcal{L}[y]$$

Some people like to memorize a few more entries such as

$$\mathcal{L}[e^{at} \cos \omega t] = \frac{s - a}{(s - a)^2 + \omega^2},$$

but I prefer to use the last rule (shifting the s -axis). Also, the rule for $\mathcal{L}\left[\frac{dy}{dt}\right]$ in terms of $\mathcal{L}[y]$ yields

$$\mathcal{L}\left[\frac{d^2y}{dt^2}\right] = s^2\mathcal{L}[y] - y(0)s - y'(0).$$

Warning: Just because you can solve a linear differential equation with the Laplace transform does not mean that you should forget what you learned in previous parts of the course. The transform method is particularly well suited for differential equations with discontinuous and impulse forcing.